

**Oil Pump IFC 540-3****Article-No.: Z-P 2000 0051**

Design	
Mass	920 g
Motor control	Sensored or self-sensing
Hydraulic power	540 l/h at 3 bar
Voltage range	10-60 VDC
Motor	BLDC

**Main characteristics**

Electric powered high-performance pump for transmission oil with BLDC-motor and intelligent control electronics (IFC = Intelligent Flow Control)

Power control: Depending on load status, processor temperature and ambient temperature

Performance data at 120°C medium / 80°C ambient temperature: 540l/h at 3 bar

**Function**

Pump: Displacement pump (gerotor), self-priming

Motor: BLDC internal rotor

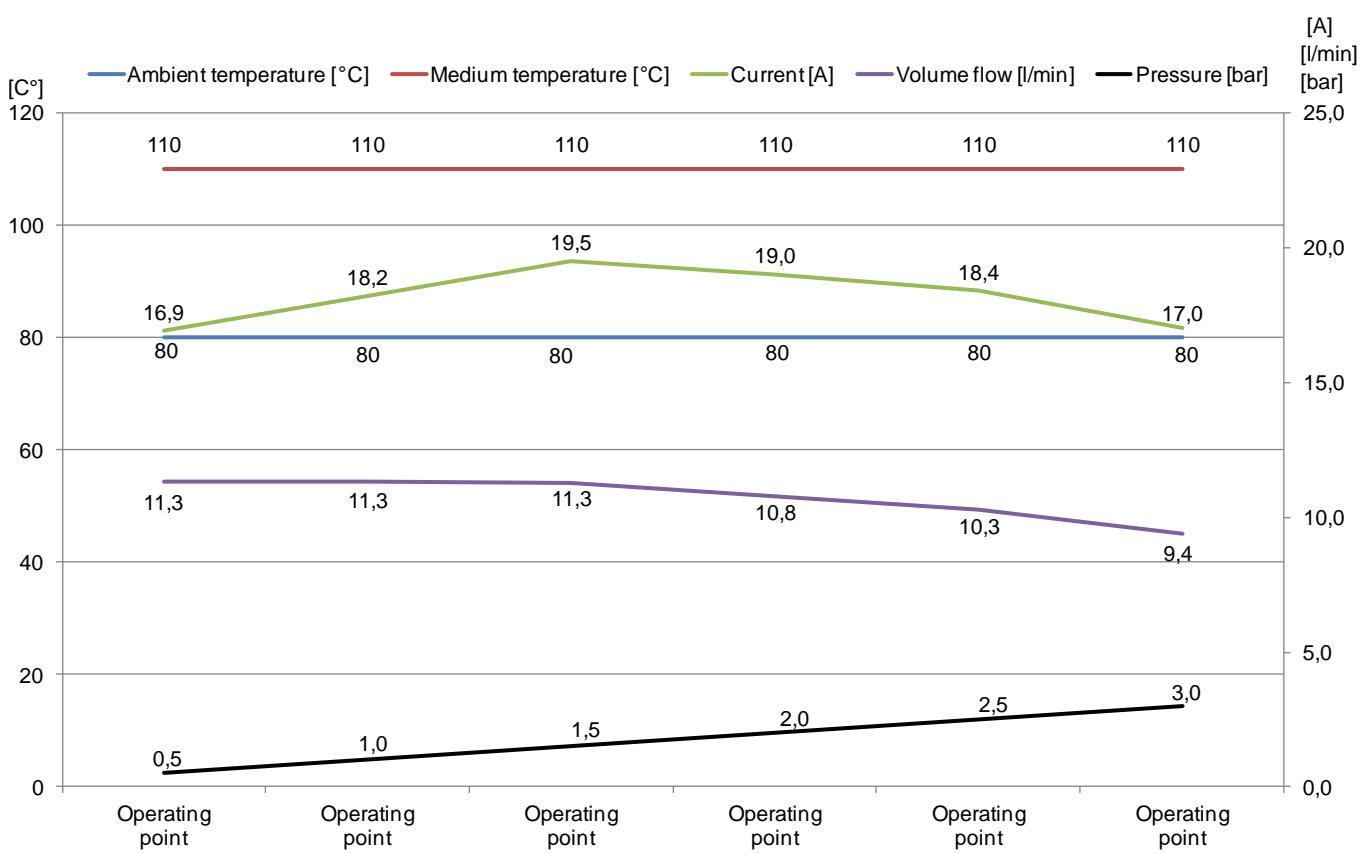
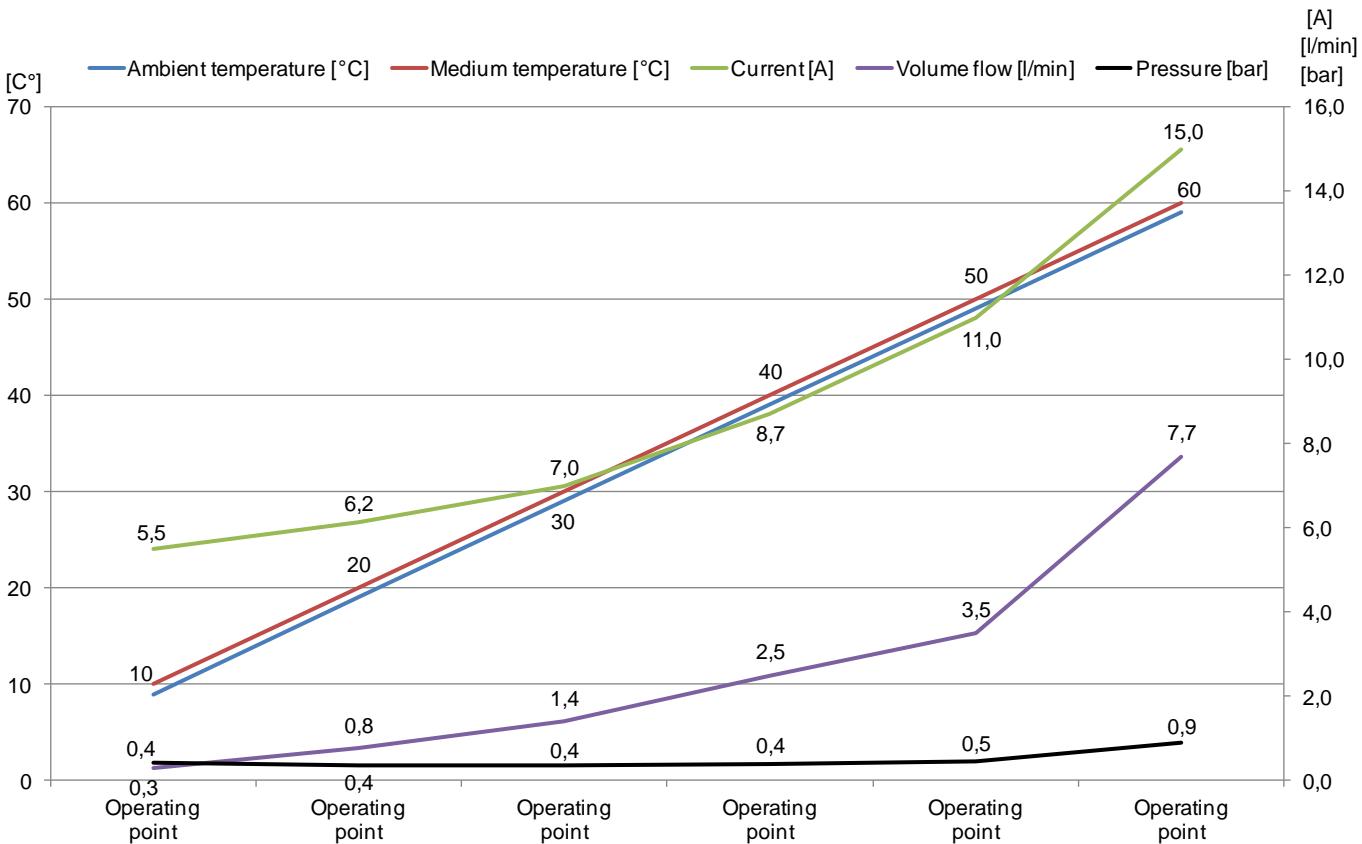
Control electronics:

- Standard ON/OFF with intelligent performance control depending on load status, processor temperature and ambient temperature
- Customer-specific interfaces (CAN, LIN etc.) available

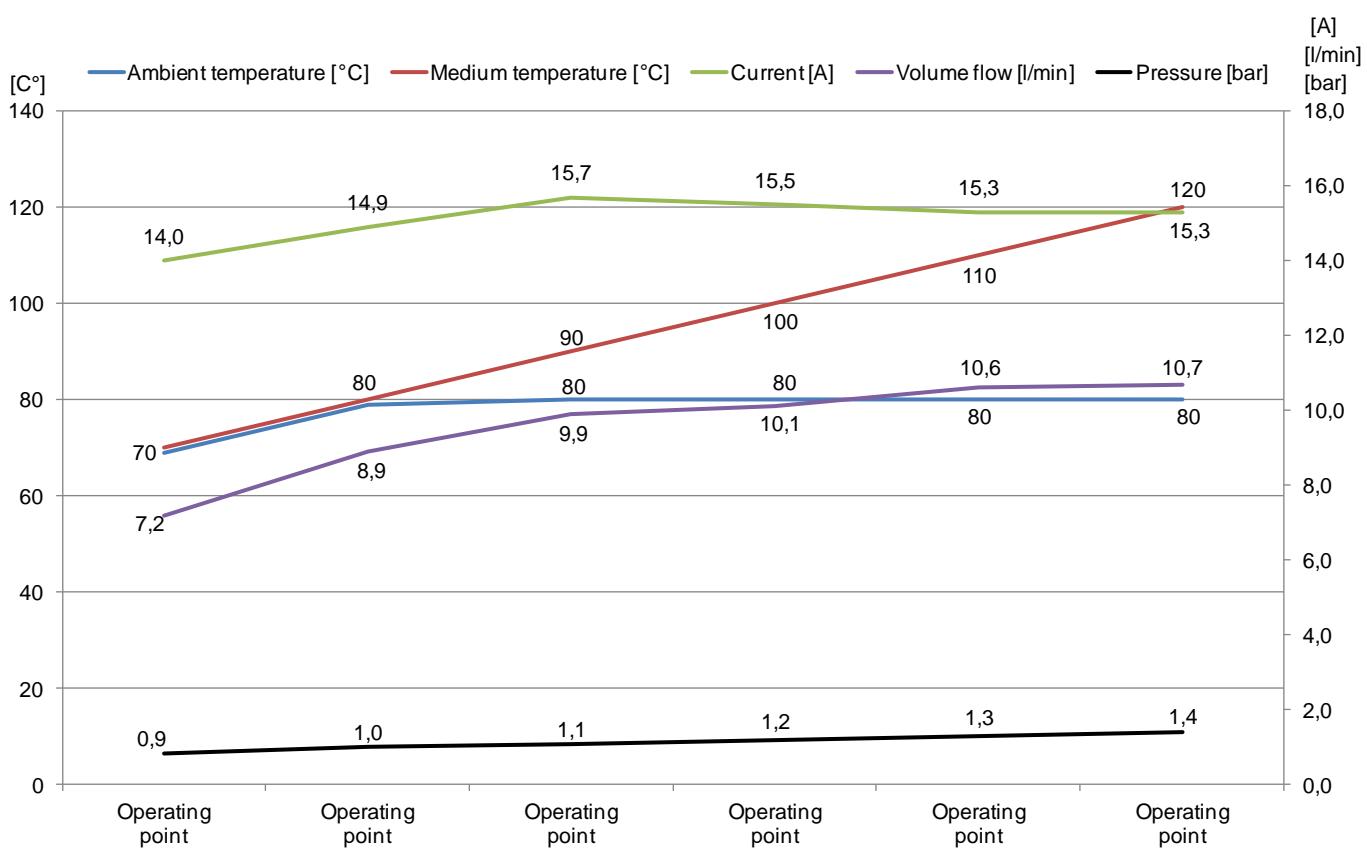
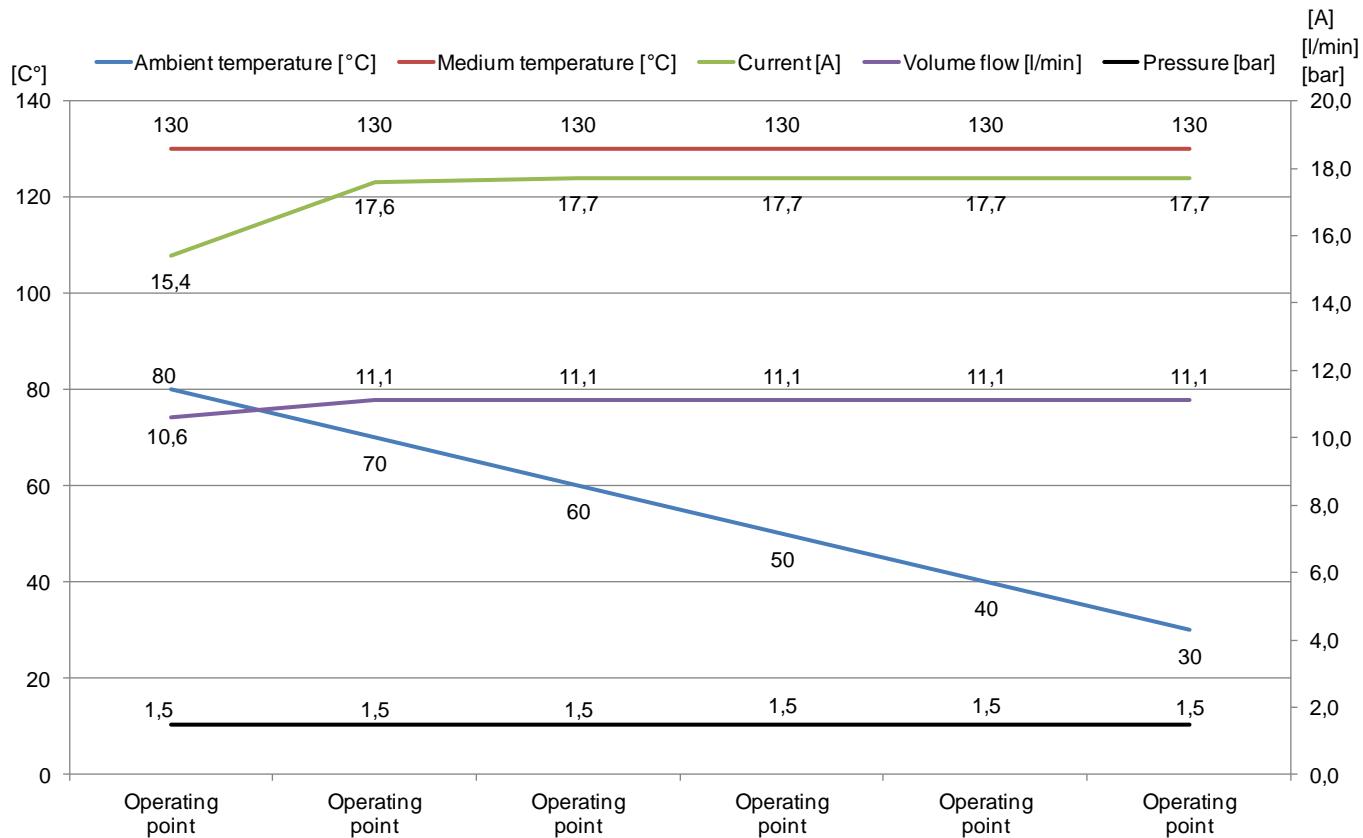
**Measures**

- Length 151 mm
- Width 55 mm (without electrical connection)
- Height 74 mm
- Hydraulic connections: -08 Wiggins tube connectors (other connections, e.g. JIC available)
- Electric connections: Souriau 8STA0 10-04 PN, on vehicle side 8STA 6 10-04 SN
- Mounting: 4 screws M5

## Measurement data – Operating points

 $U = 13,5 \text{ V}$  $U = 13,5 \text{ V}$

## Measurement data – Operating points

 $U = 13,5 \text{ V}$  $U = 13,5 \text{ V}$