


Kevlar heat protection fabric

Article no.: N-S 9009 0004

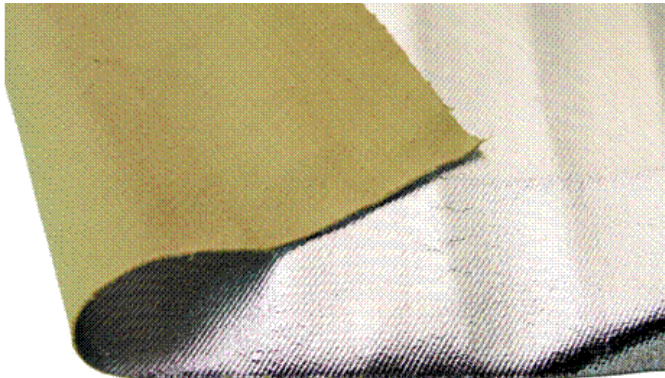

Composition	
Fabric	Fabric 50% para-aramid regenerate 50% Preox laminated on one side with double aluminized PES foil
Weight raw	480 g / m ² ± 10%
Coating	80 g / m ² ± 10 g
Width	1000 mm ± 30 mm
Thickness	1.4 mm ± 0.2 mm

Construction	
Bond	Body
Chain	130 tex x 2
Shot	130 tex x 1
Thread count Chain	14 Fd / cm ± 1 Fd
Thread count Shot	7,5 Fd / cm ± 1 Fd

Tear strength	
Chain	Chain > 2500 N / 5 cm
Shot	Shot > 500 N / 5 cm
Operating temperature	Fabric up to approx. 400 °C Coating up to 200 °C